


# TELONG ENERGY TECHNOLOGY CO., LTD.

Anjia Industrial Zone, HuanGuan South Road, GuanLan Town, ShenZhen City, GuangDong Province, China

TEL:+86-755-29052355 FAX:+86-755-27981742 E-mail:[telongbattery@sztlg.com](mailto:telongbattery@sztlg.com) <http://www.sztlg.com>

## 2CR5 Lithium Manganese Dioxide Battery

### TECHNICAL DATA

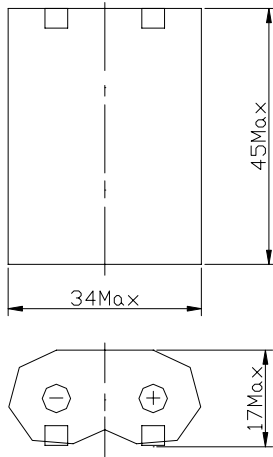

Characteristics: (23±2°C)

Nominal capacity (10mA-4.0V) .....1300mAH

Nominal voltage .....6.0V

Max. constant current.....2000mA


Max. pulse current..... 3000mA

Weight..... 43g


Volume.....34×17×45mm

Workable temperature.....-40°C ~ +70°C


### TECHNICAL CHARACTERISTICS

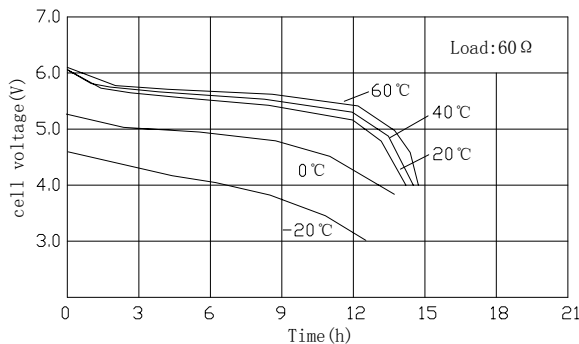

Temperature Characteristics

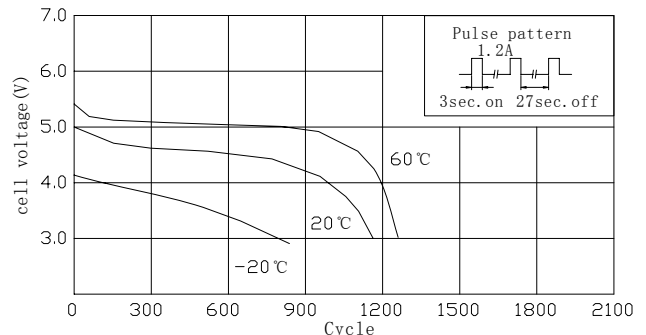

Pulse Discharge Characteristics 1

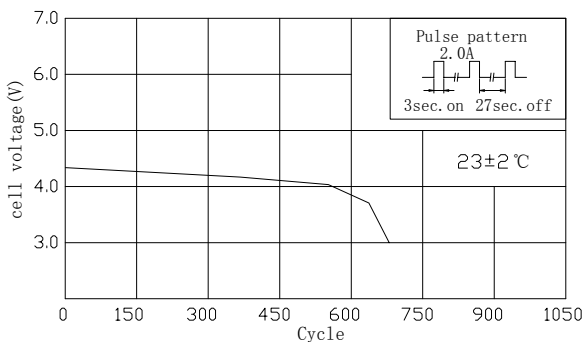

Pulse Discharge Characteristics 2

#### Caution:

Do not make the battery short-circuit, nor charge, press, disassemble, burn or forcibly discharge it; Do not use new and used batteries together nor mix different types of batteries; Do not reverse the positive and negative pole of battery while using it; Do not solder directly on battery.