


TELONG ENERGY TECHNOLOGY CO., LTD.

Anjia Industrial Zone, HuanGuan South Road, GuanLan Town, ShenZhen City, GuangDong Province, China
 TEL:+86-755-29052355 FAX:+86-755-27981742 E-mail:telongbattery@sztlg.com <http://www.sztlg.com>

CR1/3N Lithium Manganese Dioxide Battery

TECHNICAL DATA




Characteristics: (23±2°C)


| | |
|----------------------------|---------------|
| Nominal capacity..... | 170mAh |
| Nominal voltage | 3.0V |
| Max. constant current..... | 60mA |
| Max. pulse current..... | 80mA |
| Weight..... | 3.2g |
| Volume..... | Φ 11.6×10.8mm |
| Workable temperature..... | -30°C ~ +60°C |

TECHNICAL CHARACTERISTICS


Discharge curve at various temperatures

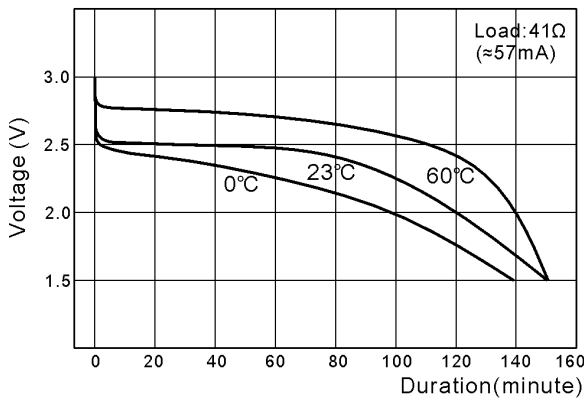

Discharge curve at various temperatures

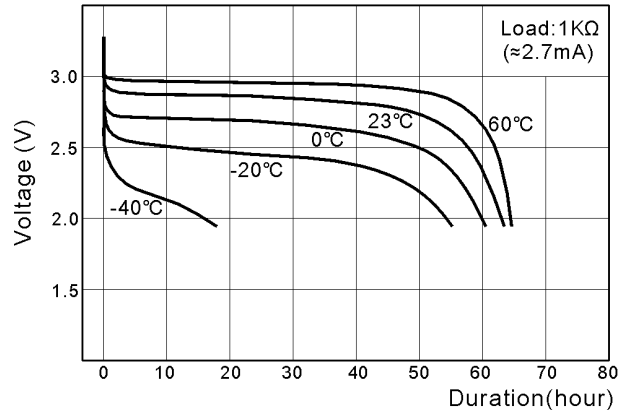

Discharge curve at various currents

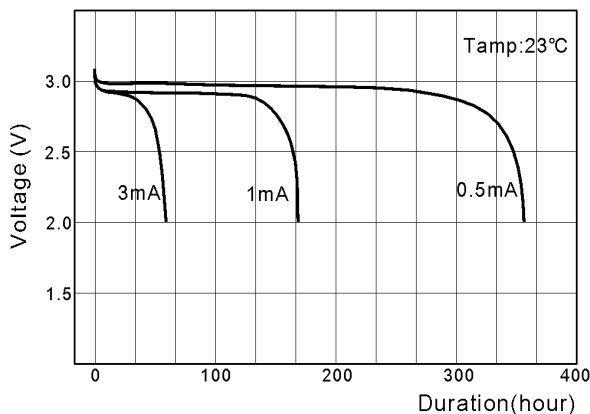

Caution:

Do not make the battery short-circuit, nor charge, press, disassemble, burn or forcibly discharge it; Do not use new and used batteries together nor mix different types of batteries; Do not reverse the positive and negative pole of battery while using it; Do not solder directly on battery.