

TELONG ENERGY TECHNOLOGY CO., LTD.


Anjia Industrial Zone, HuanGuan South Road, GuanLan Town, ShenZhen City, GuangDong Province, China

TEL:+86-755-29052355 FAX:+86-755-27981742 E-mail:telongbattery@sztlg.com <http://www.sztlg.com>


Lithium manganese dioxide battery

CR1216


Specifications

Nominal Voltage	3V	Dimensions (mm) 	A	$\phi 10.4$
Nominal Capacity	25 (mAh)		B	$\phi 12.5^{+0.0}_{-0.3}$
Continuous standard load	62 (K Ω)		C	1.3
Operating temperature	-20 ~ 70 $^{\circ}$ C		D	$1.6^{+0.0}_{-0.2}$
Weight	0.7 (g)			


Discharge characteristics

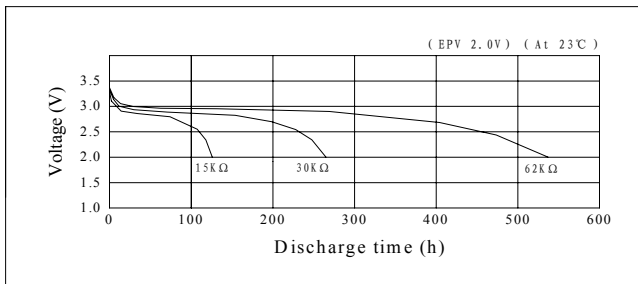


Temperature characteristics

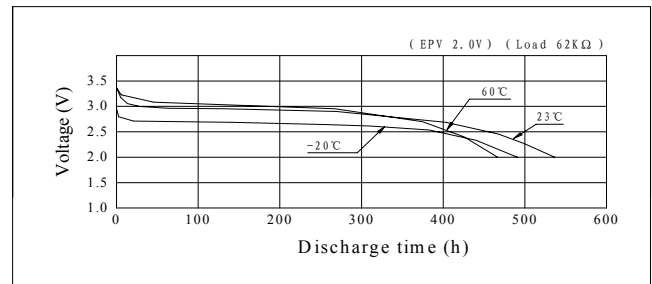


Load vs. Operating voltage

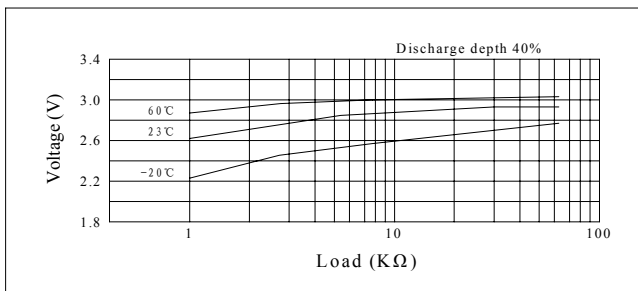

Load vs. Capacity

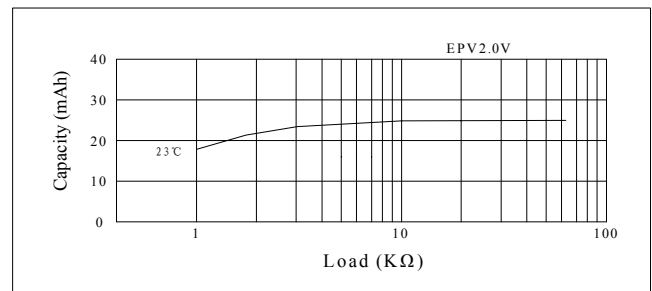

Pulse discharge characteristics

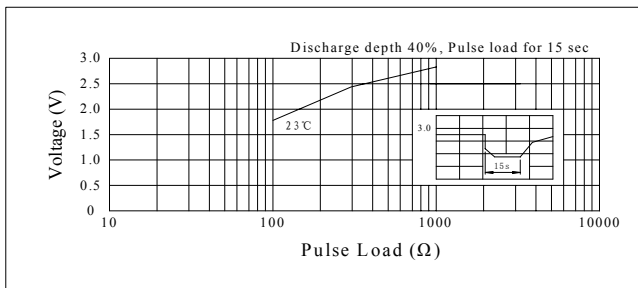

Storage characteristics

