


TELONG ENERGY TECHNOLOGY CO., LTD.

Building B, Anjia Industrial Zone, HuanGuan South Road, GuanLan Town, ShenZhen City, GuangDong Province, China

TEL:+86-755-29052355 FAX:+86-755-27981742 E-mail:telongbattery@sztlg.com <http://www.sztlg.com>

CR17335/CR123A Lithium Manganese Dioxide Battery


TECHNICAL DATA

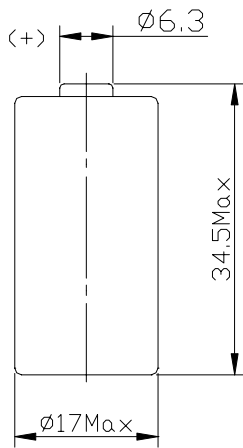


Characteristics: ($23\pm 2^\circ\text{C}$)

Nominal capacity (10mA-2.0V)	1300mAh
Nominal voltage	3.0V
Max. constant current.....	2000mA
Max. pulse current.....	3000mA
Weight.....	20g
Volume.....	$\Phi 17.0 \times 34.5\text{mm}$
Workable temperature.....	$-40^\circ\text{C} \sim +70^\circ\text{C}$


TECHNICAL CHARACTERISTICS

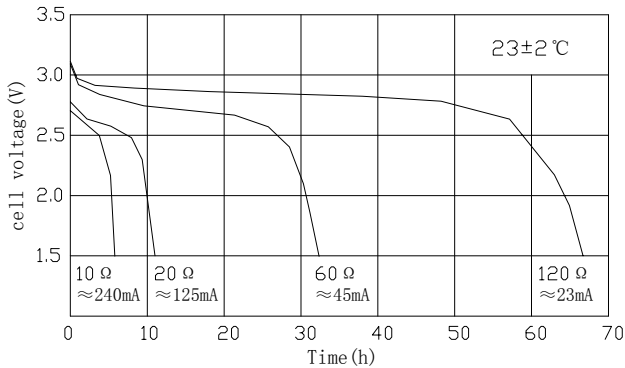

Discharge Characteristics

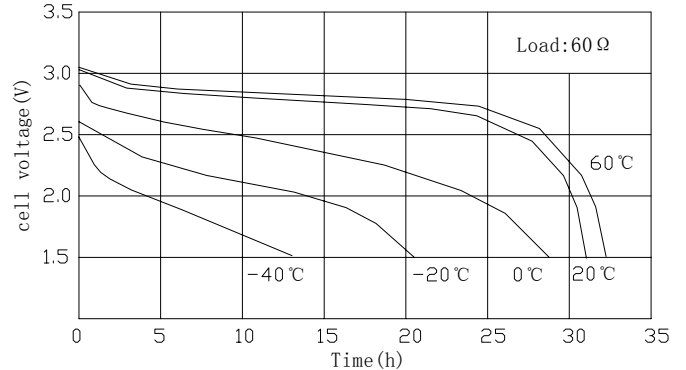

Pulse Discharge Characteristics 1

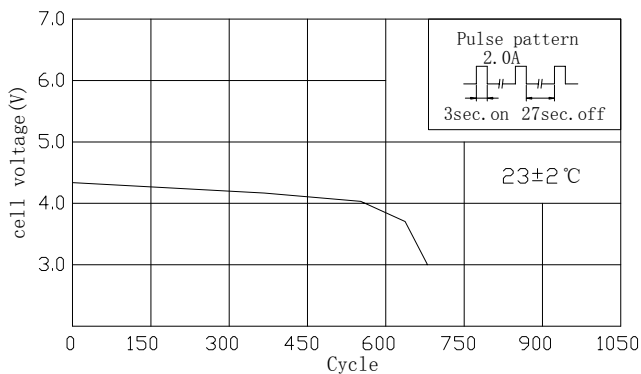

Pulse Discharge Characteristics 2

Caution:

Do not make the battery short-circuit, nor charge, press, disassemble, burn nor forcibly it; Do not use new and used batteries together nor mix different types of batteries; Do not reverse the positive and negative pole of battery while using it.