


TELONG ENERGY TECHNOLOGY CO., LTD.

Anjia Industrial Zone, HuanGuan South Road, GuanLan Town, ShenZhen City, GuangDong Province, China

TEL:+86-755-29052355 FAX:+86-755-27981742 E-mail:telongbattery@sztlg.com <http://www.sztlg.com>

CR15270/CR2 Lithium Manganese Dioxide Battery


TECHNICAL DATA

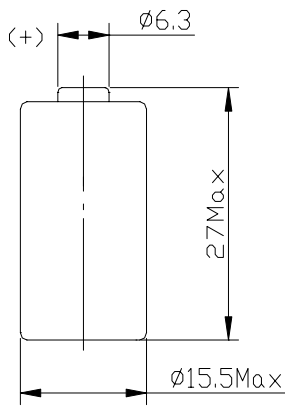


Characteristics: (23±2°C)

Nominal capacity (10mA-4.0V)	750mAh
Nominal voltage	3.0V
Max. constant current.....	1000mA
Max. pulse current.....	2000mA
Weight.....	13g
Volume.....	Φ 15.5×27.0mm
Workable temperature.....	-40°C ~ +70°C


TECHNICAL CHARACTERISTICS

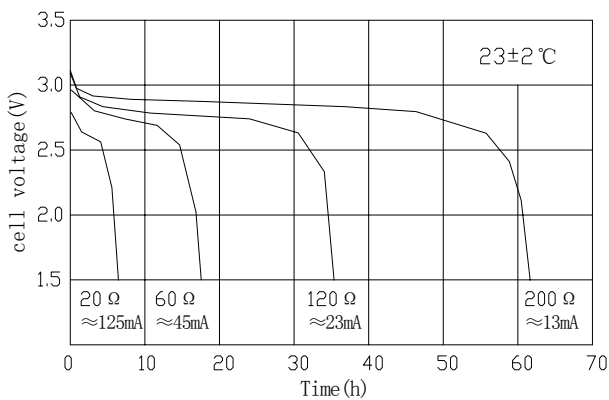

Discharge Characteristics

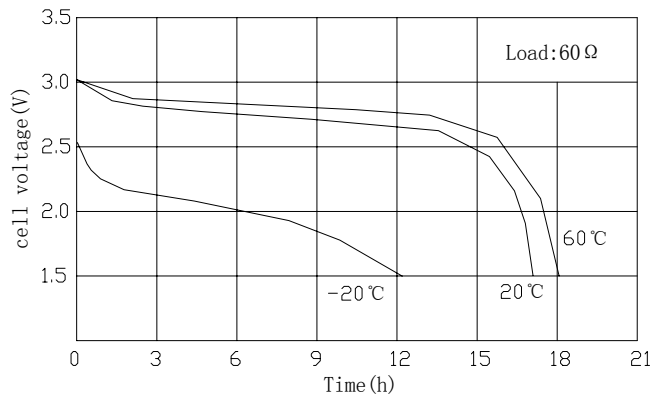

Pulse Discharge Characteristics 1

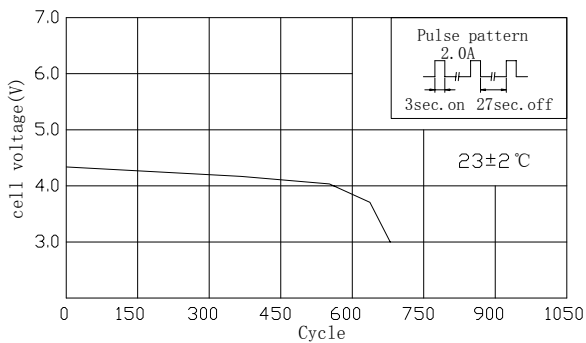

Pulse Discharge Characteristics 2

Caution:

Do not make the battery short-circuit, nor charge, press, disassemble, burn or forcibly discharge it; Do not use new and used batteries together nor mix different types of batteries; Do not reverse the positive and negative pole of battery while using it; Do not solder directly on battery.