

TELONG ENERGY TECHNOLOGY CO., LTD.


Anjia Industrial Zone, HuanGuan South Road, GuanLan Town, ShenZhen City, GuangDong Province, China

TEL:+86-755-29052355 FAX:+86-755-27981742 E-mail:telongbattery@sztlg.com <http://www.sztlg.com>


Lithium manganese dioxide battery

CR2330


Specifications

| | | | | |
|--------------------------|-----------------------------|--|---|---------------------------|
| Nominal Voltage | 3V | Dimensions (mm)  | A | $\phi 20.3$ |
| Nominal Capacity | 260 (mAh) | | B | $\phi 23.0^{+0.0}_{-0.3}$ |
| Continuous standard load | 15 (K Ω) | | C | 2.4 |
| Operating temperature | -20 ~ 70 $^{\circ}\text{C}$ | | D | $3.0^{+0.0}_{-0.3}$ |
| Weight | 4.0 (g) | | | |


Discharge characteristics

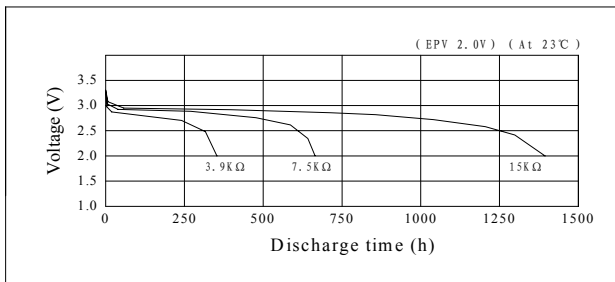


Temperature characteristics

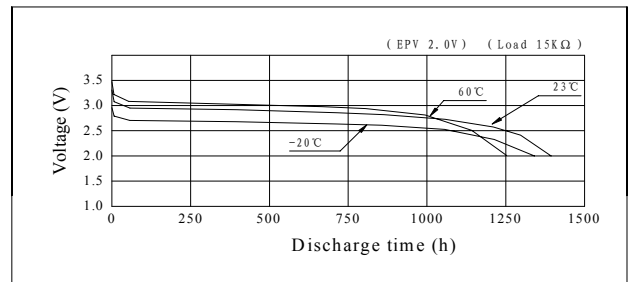


Load vs. Operating voltage

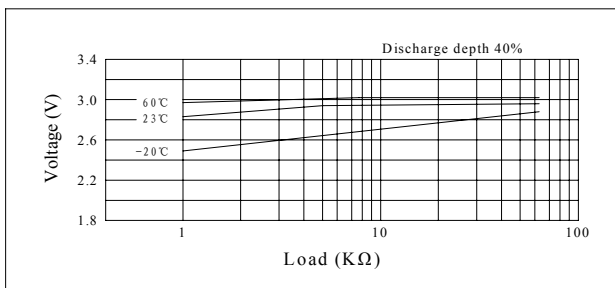

Load vs. Capacity

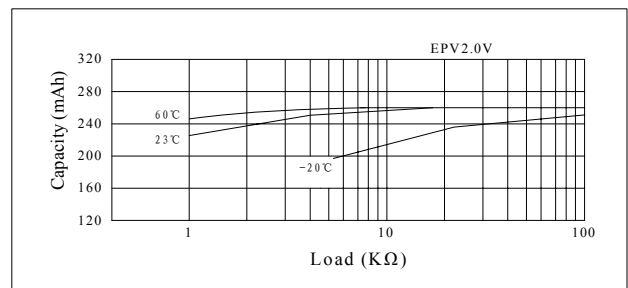

Pulse discharge characteristics

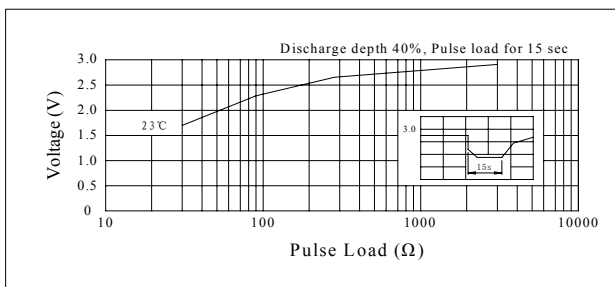

Storage characteristics

