


TELONG ENERGY TECHNOLOGY CO., LTD.

Anjia Industrial Zone, HuanGuan South Road, GuanLan Town, ShenZhen City, GuangDong Province, China
 TEL:+86-755-29052355 FAX:+86-755-27981742 E-mail:telongbattery@sztlg.com <http://www.sztlg.com>

CR9V Lithium Manganese Dioxide Battery


TECHNICAL DATA

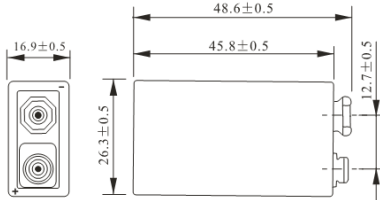


Characteristics: (23±2°C)

Nominal capacity (1mA-5.4V)	1200mAh
Nominal voltage	9.0V
Max. constant current.....	120mA
Max. pulse current.....	400mA
Weight.....	29g
Volume.....	16.9×26.3×48.6mm
Workable temperature.....	-20°C ~ +60°C


TECHNICAL CHARACTERISTICS

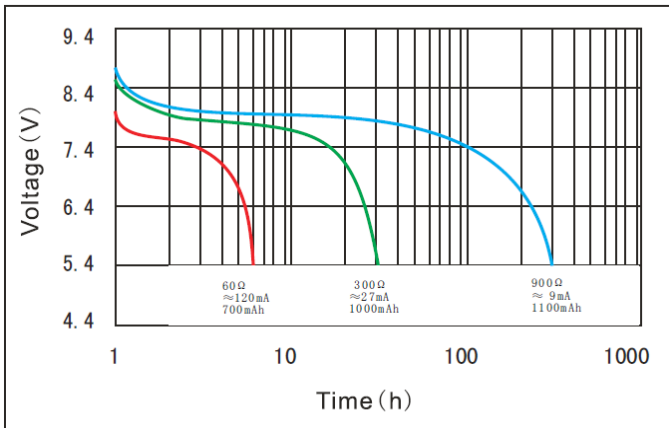

Discharge Characteristics at 25°C

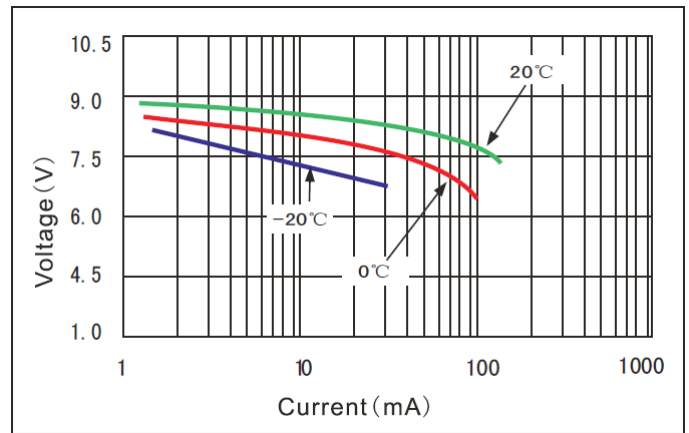

Voltage VS Temperature Curve

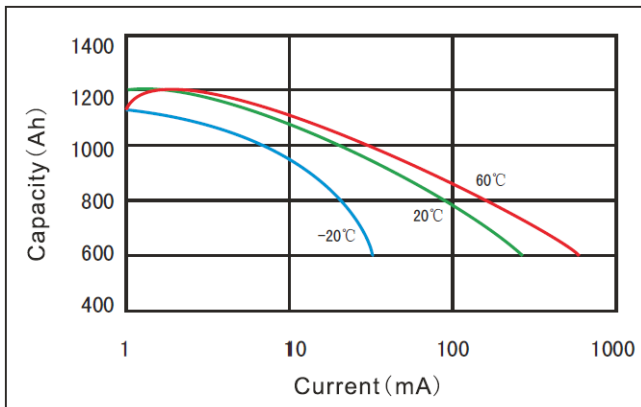

Capacity vs Current (cut off with 6.0V)

Caution:

Do not make the battery short-circuit, nor charge, press, dissemble, burn nor forcibly discharge it; Do not use new and used batteries together nor mix different types of batteries; Do not reverse the positive and negative pole of battery while using it; Do not solder directly on battery;