


TELONG ENERGY TECHNOLOGY CO., LTD.

Anjia Industrial Zone, HuanGuan South Road, GuanLan Town, ShenZhen City, GuangDong Province, China
 TEL:+86-755-29052355 FAX:+86-755-27981742 E-mail:telongbattery@sztlg.com <http://www.sztlg.com>

ER18505M Lithium Thionyl Chloride Battery

TECHNICAL DATA

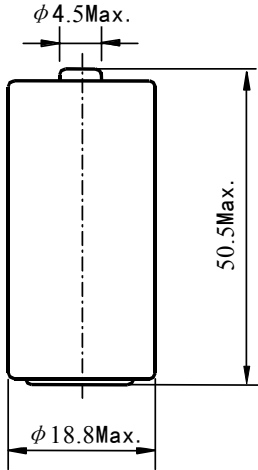


Characteristics: (23±2°C)


| | |
|------------------------------------|---------------|
| Nominal capacity (10mA-2.0V) | 3.2AH |
| Nominal voltage | 3.6V |
| Max. constant current of discharge | 1000mA |
| Max. discharge current(pulse) | 2000mA |
| Weight | 30g |
| Volume | 18.8×50.5mm |
| Operating temperature range | -55°C ~ +85°C |

TECHNICAL CHARACTERISTICS


■ Discharge characteristics at 23±2°C

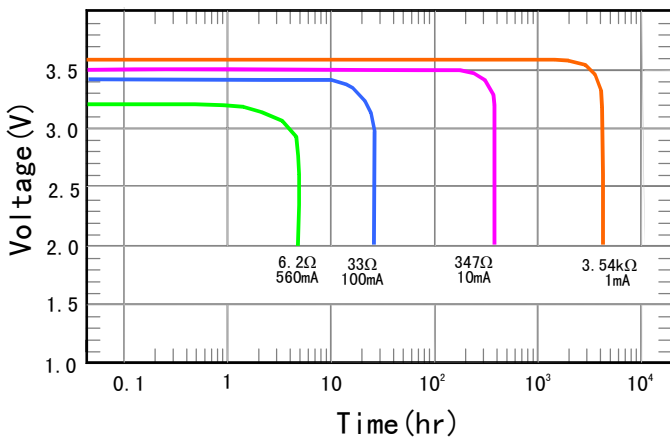

■ Capacity VS. Current

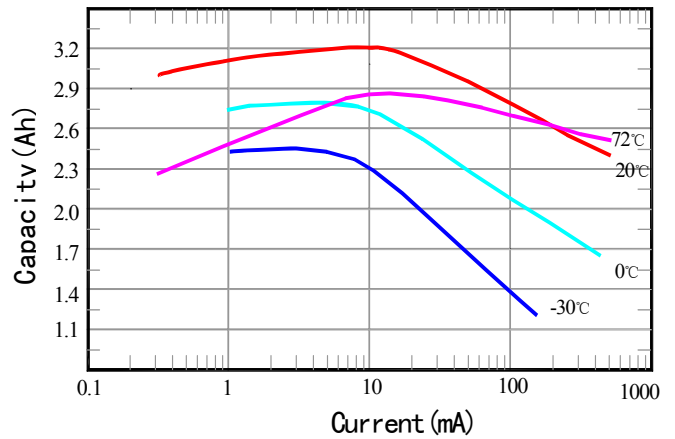

■ Voltage VS. Temperature

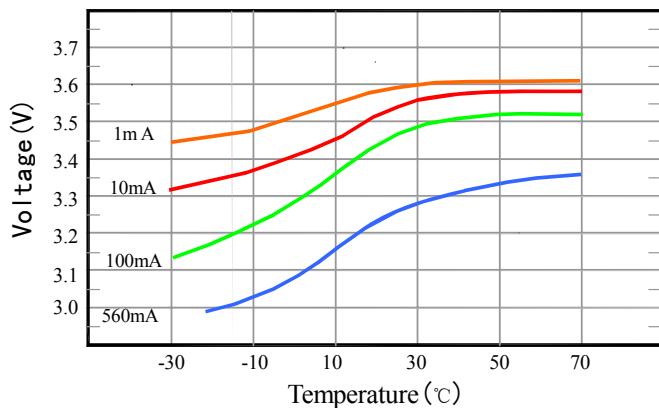

■ Important Notes:

Do not short or charge the battery.
 Over-discharging, crushing, incinerating, and disassembling the battery are prohibited.
 Do not heat/use the battery beyond the permitted temperature range.