


TELONG ENERGY TECHNOLOGY CO., LTD.

Anjia Industrial Zone, HuanGuan South Road, GuanLan Town, ShenZhen City, GuangDong Province, China
 TEL:+86-755-29052355 FAX:+86-755-27981742 E-mail:telongbattery@sztlg.com <http://www.sztlg.com>

ER26500 Lithium Thionyl Chloride Battery


TECHNICAL DATA

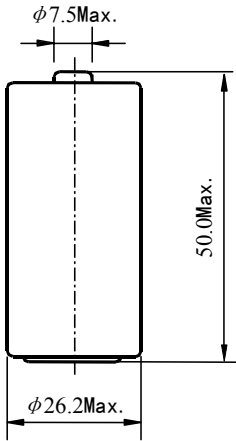


Characteristics: (23±2°C)	
Nominal capacity (3mA-2.0V)	8.5AH
Nominal voltage	3.6V
Max. constant current of discharge.....	130mA
Max. discharge current(pulse).....	400mA
Weight.....	53g
Volume.....	26.2×50.0mm
Operating temperature range.....	-55°C ~ +85°C

TECHNICAL CHARACTERISTICS


■ Discharge characteristics at 23±2°C

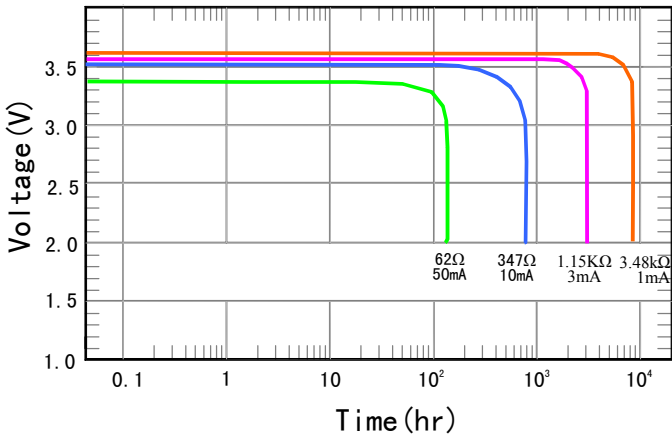

■ Capacity VS. Current

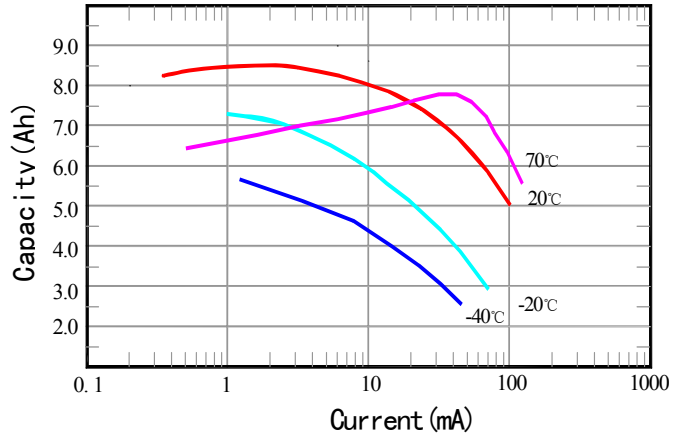

■ Voltage VS. Temperature

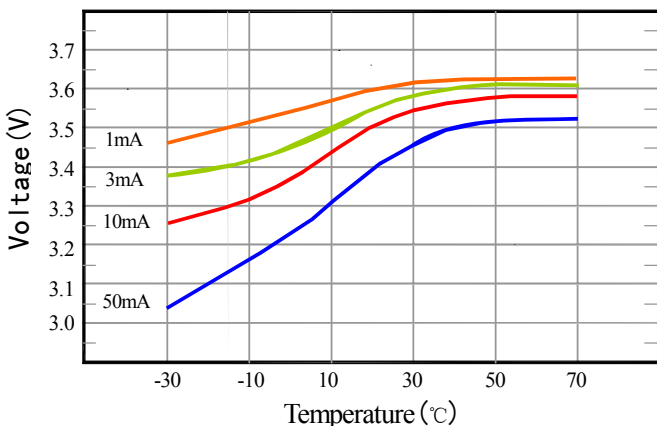

■ Important Notes:

Do not short or charge the battery.
 Over-discharging, crushing, incinerating, and disassembling the battery are prohibited.
 Do not heat/use the battery beyond the permitted temperature range.