


TELONG ENERGY TECHNOLOGY CO., LTD.

Anjia Industrial Zone, HuanGuan South Road, GuanLan Town, ShenZhen City, GuangDong Province, China
 TEL:+86-755-29052355 FAX:+86-755-27981742 E-mail:telongbattery@sztlg.com <http://www.sztlg.com>

ER34615 Lithium Thionyl Chloride Battery

TECHNICAL DATA

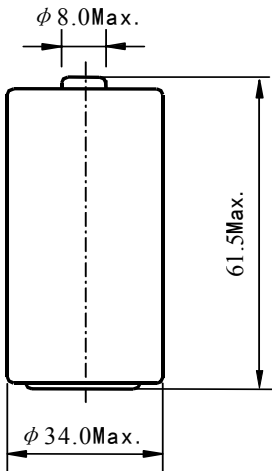


Characteristics: ($23\pm 2^\circ\text{C}$)


Nominal capacity (2mA-2.0V)	19AH
Nominal voltage	3.6V
Max. constant current of discharge.....	230mA
Max. discharge current(pulse).....	500mA
Weight.....	115g
Volume.....	34.0×61.5mm
Operating temperature range.....	-55°C ~ +85°C

TECHNICAL CHARACTERISTICS


■ Discharge characteristics at $23\pm 2^\circ\text{C}$

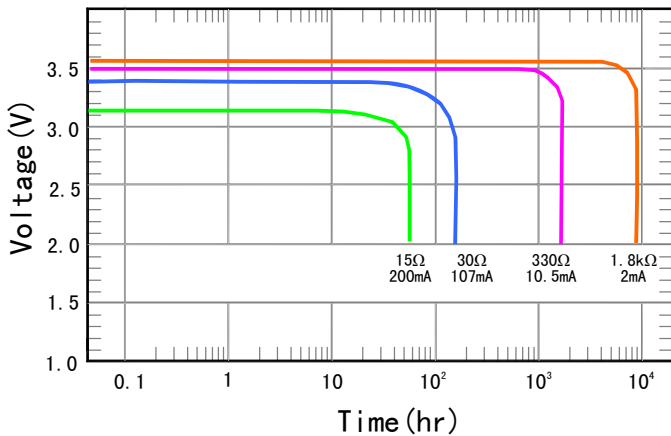

■ Capacity VS. Current

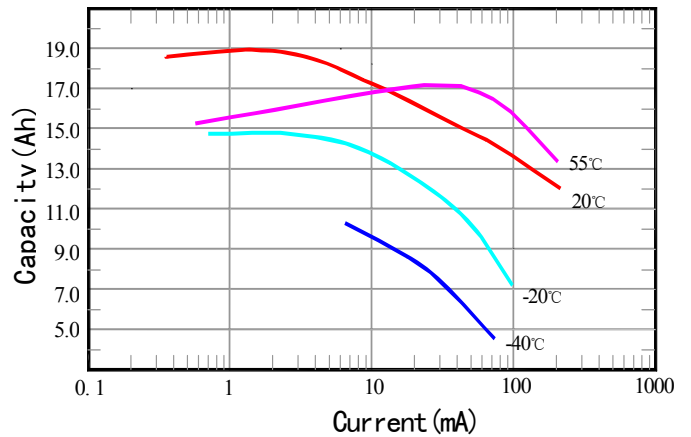

■ Voltage VS. Temperature

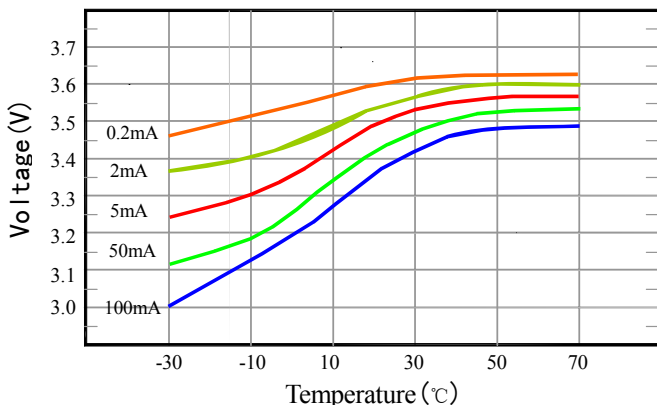

■ Important Notes:

Do not short or charge the battery.
 Over-discharging, crushing, incinerating, and disassembling the battery are prohibited.
 Do not heat/use the battery beyond the permitted temperature range.