


TELONG ENERGY TECHNOLOGY CO., LTD.

Anjia Industrial Zone, HuanGuan South Road, GuanLan Town, ShenZhen City, GuangDong Province, China
 TEL:+86-755-29052355 FAX:+86-755-27981742 E-mail:telongbattery@sztlg.com <http://www.sztlg.com>

ER34615M Lithium Thionyl Chloride Battery

TECHNICAL DATA

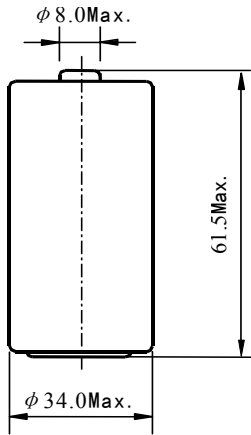


Characteristics: (23±2°C)


| | |
|---|--------------|
| Nominal capacity (10mA-2.0V) | 14.0AH |
| Nominal voltage | 3.6V |
| Max. constant current of discharge..... | 2000mA |
| Max. discharge current(pulse)..... | 3000mA |
| Weight..... | 118g |
| Volume..... | 34.0×61.5mm |
| Operating temperature range..... | -55°C ~+85°C |

TECHNICAL CHARACTERISTICS


■ Discharge characteristics at 23±2°C

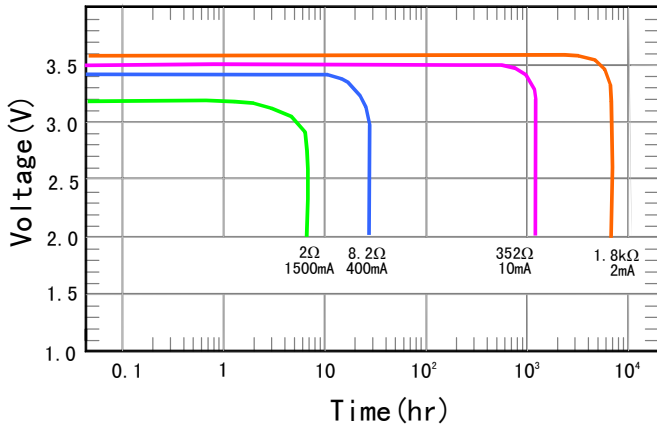

■ Capacity VS. Current

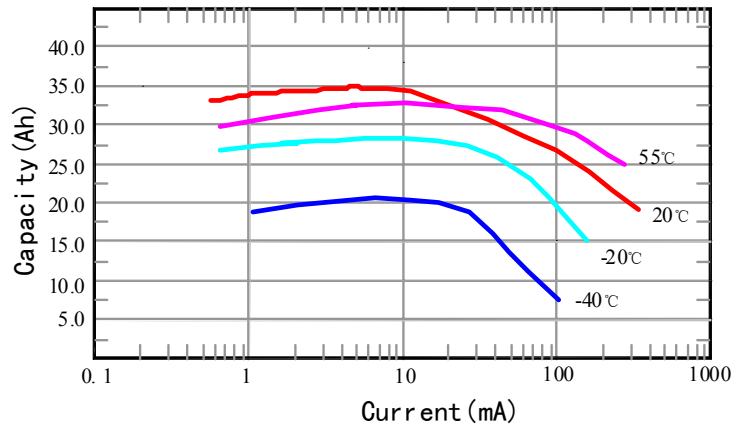

■ Voltage VS. Temperature

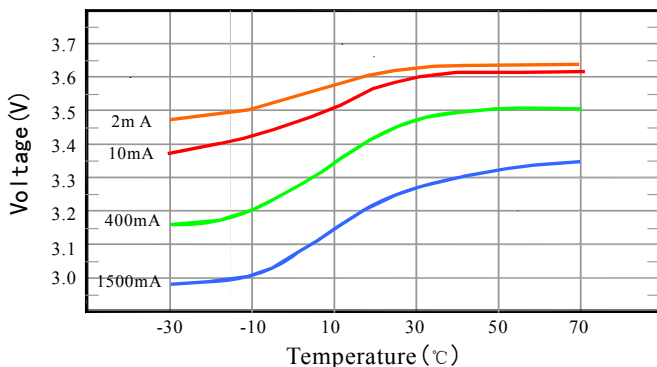

■ Important Notes:

Do not short or charge the battery.
 Over-discharging, crushing, incinerating, and disassembling the battery are prohibited.
 Do not heat/use the battery beyond the permitted temperature range.