


TELONG ENERGY TECHNOLOGY CO., LTD.

Anjia Industrial Zone, HuanGuan South Road, GuanLan Town, ShenZhen City, GuangDong Province, China
 TEL:+86-755-29052355 FAX:+86-755-27981742 E-mail:telongbattery@sztlg.com <http://www.sztlg.com>

ER9V Lithium Thionyl Chloride Battery

TECHNICAL DATA

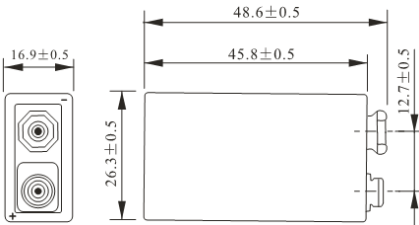


Characteristics: (23±2°C)


Nominal capacity (1mA-6V)	1200mAh
Nominal voltage	10.8V
Max. constant current of discharge.....	25mA
Max. discharge current(pulse).....	100mA
Weight.....	33g
Volume.....	16.9×26.3×48.6mm
Operating temperature range.....	-55°C ~ +85°C

TECHNICAL CHARACTERISTICS


■ Discharge Characteristics at 25°C

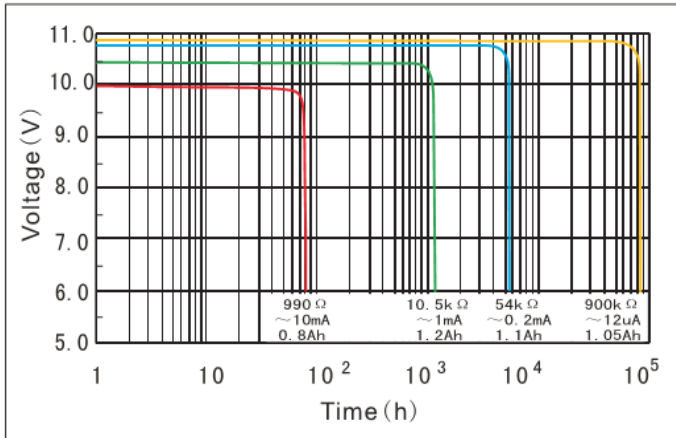

■ Voltage VS Temperature Curve

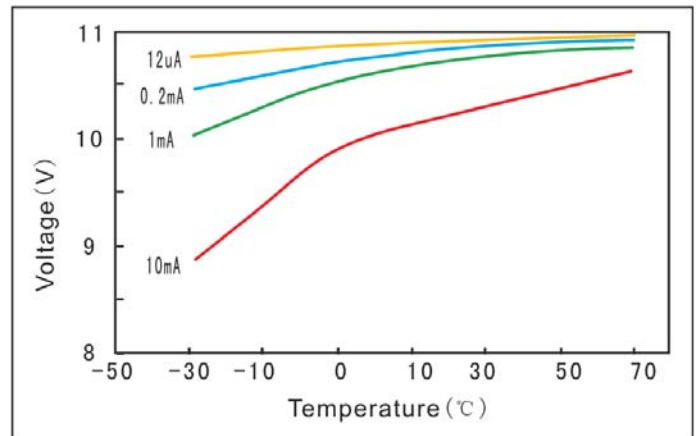

■ Capacity vs Current (cut off with 6.0V)

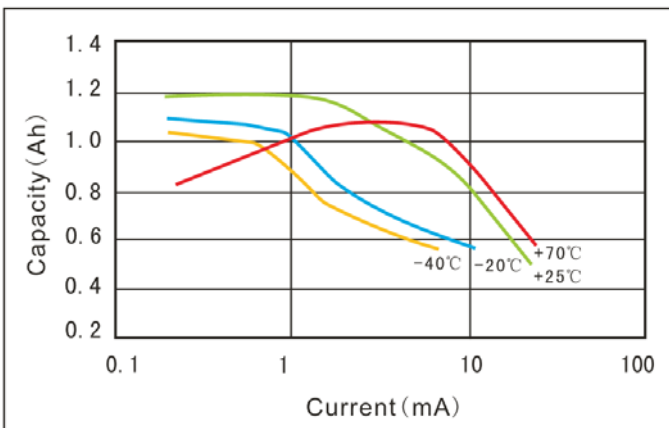

■ Important Notes:

Do not short or charge the battery.
 Over-discharging, crushing, incinerating, and disassembling the battery are prohibited.
 Do not heat/use the battery beyond the permitted temperature range.